

**HOMEMATIC IP GARAGE DOOR MODUL**  
**HOMEMATIC IP GARAGE DOOR MODULE**  
**HmIP-MOD-TM**





153088 06/2018  
902005-21-6-50


NovoPort

BLACK


1




WHITE /  
NOVOLINE

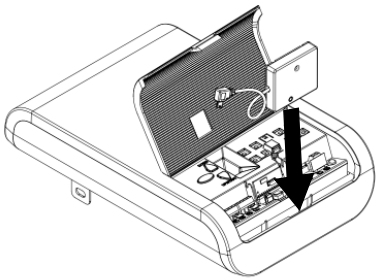

2

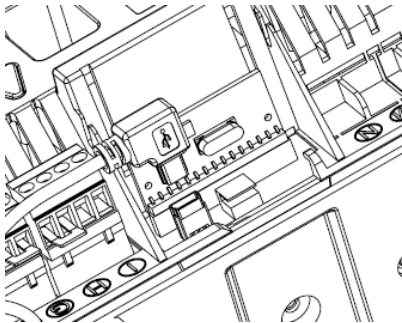

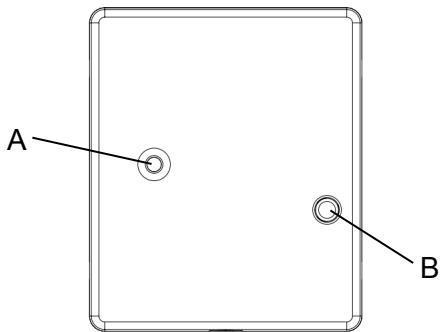

Für die Sicherheit von Personen ist es wichtig, diesen Anweisungen Folge zu leisten. Diese Anweisungen sind aufzubewahren. Wenn Sie das Gerät anderen Personen zur Nutzung überlassen, übergeben Sie auch diese Anleitung.

## Symbolerklärung



### **WARNUNG**

... weist auf eine Gefährdung hin, die, wenn sie nicht gemieden wird, den Tod oder eine schwere Verletzung zur Folge haben könnte.

### **HINWEIS**

### **HINWEIS**

... weist auf wichtige Informationen (z.B. Sachschäden), aber nicht auf eine Gefährdung hin.



*Information*

### **INFORMATION**

weitere Tipps und Informationen



## **Kinder**

Stellen Sie sicher, dass das Smart Phone oder Tablet PC nicht in Kinderhände gelangt und nur von Personen bedient wird, die in die Funktionsweise des Tores eingewiesen sind.



## **Tor**

Durchfahren Sie das Tor erst, wenn es vollständig geöffnet ist.



## **Veränderung des Geräts**

Aus Sicherheits- und Zulassungsgründen ist das eigenmächtige Umbauen und/oder Verändern des Geräts nicht gestattet.



## **Sichtbare Schäden**

Verwenden Sie das Gerät nicht, wenn es sichtbare Schäden aufweist. Lassen Sie das Gerät im Zweifelsfall von einer Fachkraft prüfen.

Zum Bedienen und Abfragen eines Garagentorantriebes über ein Smart Phone oder einen Tablet PC.



### **Sicherheitslichtschranke**

Bei Bedienung der Toranlage ohne eine Sicherheitslichtschranke muss das Tor in Sichtweite betätigt werden. Bei Bedienung der Toranlage ohne Sicht zum Tor muss eine Sicherheitslichtschranke installiert sein.

## **Vorhersehbare Fehlanwendung**

Eine andere Verwendung als die im Kapitel "Bestimmungsgemäßer Gebrauch" beschriebene gilt als vernünftigerweise vorhersehbare Fehlanwendung, dazu gehören z.B.:

- Verwendung des Gerätes an einen Personal Computer (PC)

Für Sach- und / oder Personenschäden, die durch vernünftigerweise vorhersehbare Fehlanwendung und aus der Nichtbeachtung dieses Handbuchs resultieren, übernimmt der Hersteller keinerlei Haftung.

**Ortsfeste Installation**

Das Gerät darf nur für ortsfeste Installationen verwendet werden. Das Gerät ist sicher innerhalb einer festen Installation zu fixieren.

**Umgebung**

Betreiben Sie das Gerät nur in trockener sowie staubfreier Umgebung, setzen Sie es keinem Einfluss von Feuchtigkeit, Vibrationen, ständiger Sonnen- oder anderer Wärmestrahlung, Kälte und keinen mechanischen Belastungen aus.

1. Schieben Sie das Modul in den entsprechenden Einschub oder stecken Sie es in die entsprechende Tasche des jeweiligen Garagentorantriebes.

**Information****Garagentorantriebstyp**

Die Einbausituation ist je nach Typ des Garagentorantriebes unterschiedlich.

2. Verbinden Sie den Stecker des Moduls mit dem Garagentorantrieb (siehe Betriebsanleitung Garagentorantrieb).

1. Öffnen Sie die Homematic IP APP.
2. Wählen Sie den Menüpunkt "Geräte anlernen" aus.
3. Der Anlernmodus ist für 3 Minuten nach der Installation des Moduls an den Garagentorantrieb aktiv.



### Information

#### Anlernmodus erneut starten

Sollten die 3 Minuten bereits verstrichen sein, betätigen Sie kurz die Systemtaste (A) mit einem geeigneten Gegenstand (z.B. Büroklammer oder Bleistift).

4. Das Gerät erscheint automatisch in der APP.
5. Zur Bestätigung geben Sie in der APP die letzten vier Ziffern der Gerätenummer (SGTIN) ein oder scannen Sie den QR-Code. Die Gerätenummer finden Sie direkt auf dem Modul



### Information

#### Beispiel Gerätenummer



HmlIP-MOD-TM

Key: xxxxx-xxxxx-xxxxx-

xxxxx-xxxxx

SGTIN: xxxx-xxxx-xxxx-

xxxx-xxxxx ←

6. Warten Sie, bis der Anlernvorgang abgeschlossen ist.
7. Zur Bestätigung eines erfolgreichen Anlernvorgangs, leuchtet die LED (B) am Modul grün.
8. Sollte die LED (B) rot leuchten, versuchen Sie es erneut.
9. Schließen Sie die Inbetriebnahme ab, indem Sie den Anweisungen in der APP folgen.

## **EU-Konformitätserklärung**

**DE**

Hiermit erklärt TORMATIC, dass der Funkanlagentyp der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter folgender Internetadresse verfügbar:

**[www.tormatic.de/nc/downloads.html](http://www.tormatic.de/nc/downloads.html)**

Hersteller:  
TORMATIC  
Eisenhüttenweg 6  
44145 Dortmund / Germany  
[www.tormatic.de](http://www.tormatic.de)

Dortmund, 08.05.2018

A handwritten signature in black ink, appearing to read 'D. Gößling'.

**Dirk Gößling**  
Geschäftsführer

---

**f**

868,0MHz - 868,6MHz

869,4MHz - 869,65MHz

---

**P<sub>erp</sub>**

10dBm



35g



64mm x 54mm x 14mm



&gt;250m



-10°C

+50°C



IP 20

Attention important safety instructions:  
Before commencing any work on the product, carefully read through the operating instructions from start to finish, in particular the section entitled "Safety" and the related safety advice. It is important for you to have understood what you have read. The instructions must be kept. If you hand over the device to other persons for use, please hand over this manual as well.

## Explanation of the symbol



### **WARNING**

... indicates that instructions being given which, if not observed, could lead to death or serious injury.

**NOTE**

### **NOTE**

... indicates important information (for example property damage) but not on a danger.



*Information*

### **INFORMATION**

further tips and information



### **Children**

Make sure that the Smartphone or Tablet PC are kept out of the reach of children. All persons using the system must be shown how to operate it properly and safely.



### **Door**

Only drive through the door when it is fully open.



### **Device change / modification**

For safety and licencing reasons, unauthorized change and/or modification of the device is not permitted



### **Signs of damage**

Do not use the decive if there are signs of damage to the housing, control elements or connecting sockets, for example. If you have any doubts, have the device checked by an expert.

To operate and query of your garage door operator via a Smartphone or Tablet PC.



### **Safety photo cell**

When the operator is being used without a safety photocell, the gate has to be operated within the visual range. When operating of the door out of the visual range, a safety light barrier must be installed.

## Predictable misuse

Another use than the one described in chapter "Intended use" is considered reasonably predictable misuse. This includes e.g.:

- Using the device with a Personal Computer (PC)

For property damage and/or personal injury caused by reasonably predictable misuse or disregarding this manual, the manufacturer does not assume any liability.



## **Fixed Installation**

The device may only be used for fixed installations. The device must be securely attached within a fixed installation.



## **Environment**

The device may only be operated in dry and dustfree environment and must be protected from the effects of moisture, vibrations, solar or other kinds of heat radiation, cold and mechanical loads.

1. Slide the device in the corresponding slot of the garage door operator.



## **Information**

### **Garage door operator**

The position of the slot for the module depends on the garage door operator type.

2. Plug the connector of the device to the garage door operator (see the manual of the garage door operator).

1. Open the Homematic IP APP on your smartphone.
2. Select the menu item "Teach-in device".
3. After having installed the device on the garage door operator, the teach-in mode remains activated for 3 minutes.

**Information****Restart teach-in mode**

Push the system switch (A) shortly with a suitable object (e.g. paper clip or pencil), after the 3 minutes have expired.

4. Your device will automatically appear in the app.
5. To confirm, please enter the last four digits of the device number (SGTIN) in your app or scan the QR code. Therefore, please see the sticker supplied or attached to the device.

**Information****Example device number**

HmIP-MOD-TM

Key: xxxxx-xxxxx-xxxxx-

xxxxx-xxxxx

SGTIN: xxxx-xxxx-xxxx-

xxxx-xxxxx ←

6. Please wait until teach-in is completed.
7. If teaching-in was successful, the LED (B) on the device lights up green. The device is now ready for use.
8. If the LED (B) lights up red, please try again.
9. Complete the setup of the device by following the instructions in the app.

## EU Declaration of Conformity

EN

TORMATIC hereby declares that the type of radio equipment is compliant to Directive 2014/53/EU. Please refer to the Internet for the full text of the EU Declaration of Conformity:

**[www.tormatic.de/nc/downloads.html](http://www.tormatic.de/nc/downloads.html)**

Manufacturer:  
TORMATIC  
Eisenhüttenweg 6  
44145 Dortmund / Germany  
[www.tormatic.de](http://www.tormatic.de)

Dortmund, 08.05.2018



**Dirk Gößling**  
Managing Director

*f*

868.0MHz - 868.6MHz  
869.4MHz - 869.65MHz

$P_{\text{erp}}$

10dBm



35g



64mm x 54mm x 14mm



>250m



-10°C

+50°C



IP 20



